

# STERLING®


A KOHLER COMPANY

ALL PRO®

## Features

- Compression molded from our exclusive solid Vikrell® material
- Convenient shelving and acrylic towel bar on back wall
- Tongue-and-groove 4-piece modular design allows for easy "snap together" installation
- Durable swirl-gloss finish
- Caulk required for installation
- 10-year consumer/3-year commercial limited warranty
- 15" (381 mm) bath depth (floor to top of threshold)
- 60-1/4" (1530 mm) x 31-1/2" (800 mm) x 74" (1880 mm) complete unit rough-in dimensions include flange
- 60" (1524 mm) x 30" (762 mm) x 72-3/4" (1848 mm) complete unit finished dimensions

60" BATH AND WALL SURROUND  
**61040110**  
 ALSO 61040120, 61040510, 61040520

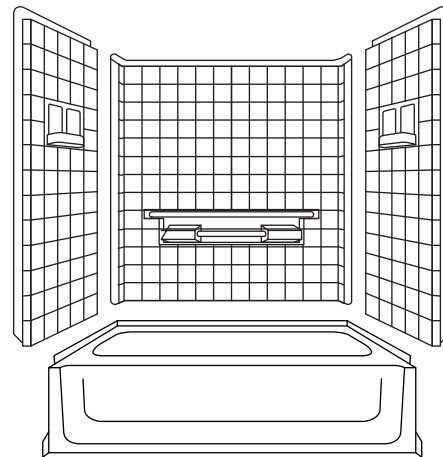

## Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASTM E162
- ASTM E662
- CSA B45.5/IAPMO Z124
- HUD, UM Bulletin 73A
- NAHB Research Foundation, Inc.

## Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

## Specified Model

Model	Complete Unit Description	Colors/Finishes	
61040110	60" bath and wall surround, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
61040120	60" bath and wall surround, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
61040510	60" bath and wall surround, 5 pack, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
61040520	60" bath and wall surround, 5 pack, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
Model	Wall Component Description	Colors/Finishes	
61044100	Complete wall set	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

## Technical Information

Fixture*:	
Weight (Single complete unit)	78 lbs (35.4 kg)
To overflow:	
Water depth	9-3/8" (238 mm)
Capacity	44 gal (166.6 L)
* Approximate measurements for comparison only.	

Model	Door maximum width	Door maximum height
61040110	*57-1/2" (1461 mm)	*NA
61040120		
61040510		
61040520		
* Varies with alternative walls		

## Installation Notes

Install this product according to the installation guide.

Size the drain cutout to fit the drain assembly that will be used.

Double studding is recommended for pivot shower door installations.

Studs should be positioned roughly as shown.

