

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Niveous

Pendant 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
PD-52307 7"	3000K 90	AB Aged Brass BN Brushed Nickel WT White	9.5W	777	588	Yes

Example: **PD-52307-WT**

For custom requests please contact customs@wacighting.com

DESCRIPTION

The Perfect sphere. Niveous reflects the smooth, frosty surface of fresh snow. Enhancing the simple purity of the flawless etched glass, Niveous offers optimized light distribution deploying multiple mid-powered LEDs to achieve an evenly lit globe with mouth blown etched triplex glass.

FEATURES

- Mouth blown etched opal glass provides even illumination
- Slope ceiling adaptable. Hang straight swivel up to 90 degrees
- Three 12 inch and one 6 inch downrods included (additional downrods available)
- Driver installed within the Junction Box, driver dimension: 2.95" x 1.88" x 1.14"
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%
Rated Life:	70000 Hours
Standards:	ETL, cETL, Title 24 JA8-2019 Compliant Damp Location Listed
Construction:	Aluminum hardware with opal glass diffuser




FINISHES:



White Brushed Nickel Aged Brass

LINE DRAWING:

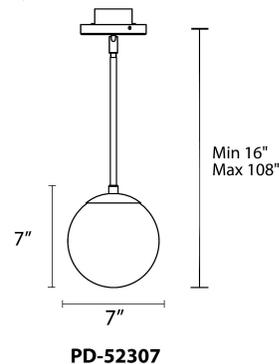

REPLACEMENT PARTS

- RPL-GLA-52307 - Glass for PD-52307
- RPL-ROD-IN06-WT - 6" rod - WT finish
- RPL-ROD-IN12-WT - 12" rod - WT finish
- RPL-ROD-IN06-BB - 6" rod - AB finish
- RPL-ROD-IN12-BB - 12" rod - AB finish
- RPL-ROD-IN06-BN - 6" rod - BN finish
- RPL-ROD-IN12-BN - 12" rod - BN finish

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Niveous

Pendant 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
PD-52310 10"	3000K 90	AB Aged Brass BN Brushed Nickel WT White	13.9W	905	685	Yes

Example: **PD-52310-WT**

For custom requests please contact customs@wacighting.com

DESCRIPTION

The Perfect sphere. Niveous reflects the smooth, frosty surface of fresh snow. Enhancing the simple purity of the flawless etched glass, Niveous offers optimized light distribution deploying multiple mid-powered LEDs to achieve an evenly lit globe with mouth blown etched triplex glass.

FEATURES

- Mouth blown etched opal glass provides even illumination
- Slope ceiling adaptable. Hang straight swivel up to 90 degrees
- Three 12 inch and one 6 inch downrods included (additional downrods available)
- Driver installed within the Junction Box, driver dimension: 2.95" x 1.88" x 1.14"
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%
Rated Life:	70000 Hours
Standards:	ETL, cETL, Title 24 JA8-2019 Compliant Damp Location Listed
Construction:	Aluminum hardware with opal glass diffuser

REPLACEMENT PARTS


- RPL-GLA-52310 - Glass for PD-52310
- RPL-ROD-IN06-BB - 6" rod - AB finish
- RPL-ROD-IN12-BB - 12" rod - AB finish
- RPL-ROD-IN06-WT - 6" rod - WT finish
- RPL-ROD-IN12-WT - 12" rod - WT finish
- RPL-ROD-IN06-BN - 6" rod - BN finish
- RPL-ROD-IN12-BN - 12" rod - BN finish



FINISHES:



LINE DRAWING:

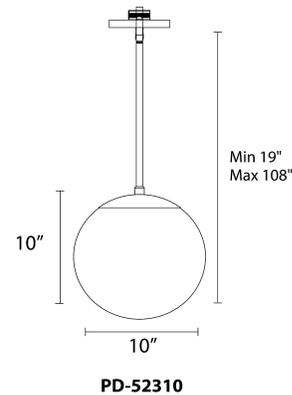

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Niveous

Pendant 3000K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
PD-52313 13"	3000K 90	AB Aged Brass BN Brushed Nickel WT White	14.1W	907	715	Yes

Example: **PD-52313-WT**

For custom requests please contact customs@wacighting.com

DESCRIPTION

The Perfect sphere. Niveous reflects the smooth, frosty surface of fresh snow. Enhancing the simple purity of the flawless etched glass, Niveous offers optimized light distribution deploying multiple mid-powered LEDs to achieve an evenly lit globe with mouth blown etched triplex glass.

FEATURES

- Mouth blown etched opal glass provides even illumination
- Slope ceiling adaptable. Hang straight swivel up to 90 degrees
- Three 12 inch and one 6 inch downrods included (additional downrods available)
- Driver installed within the Junction Box, driver dimension: 2.95" x 1.88" x 1.14"
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%
Rated Life:	70000 Hours
Standards:	ETL, cETL, Title 24 JA8-2019 Compliant Damp Location Listed
Construction:	Aluminum hardware with opal glass diffuser




FINISHES:



White Brushed Nickel Aged Brass

LINE DRAWING:

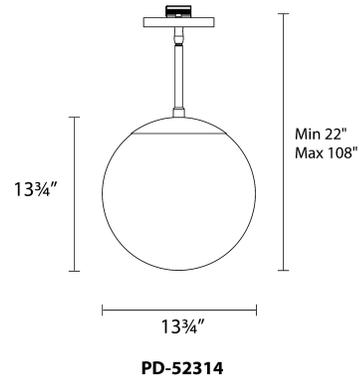

REPLACEMENT PARTS

- RPL-GLA-52313 - Glass for PD-52313
- RPL-ROD-IN06-BB - 6" rod - AB finish
- RPL-ROD-IN12-BB - 12" rod - AB finish
- RPL-ROD-IN06-BN - 6" rod - BN finish
- RPL-ROD-IN12-BN - 12" rod - BN finish
- RPL-ROD-IN06-WT - 6" rod - WT finish
- RPL-ROD-IN12-WT - 12" rod - WT finish