

# QUARRY TEXTURES™

QUARRY

## QUARRY

### USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR



STEPWISE™



TRU-EDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE



FLEXFIT™




QUARRY



NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

## ABRASIVE SURFACE

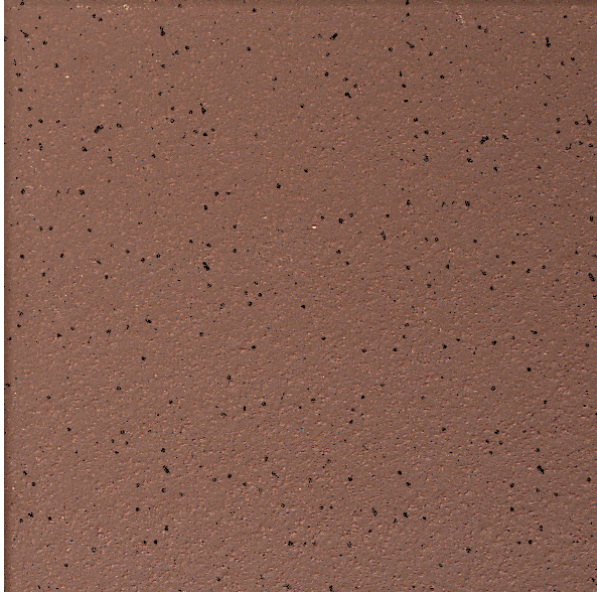


DIABLO RED OT01 (1)



ASHEN GRAY OT03 (2)



ADOBE BROWN OT05 (2)



SAHARA SAND OT08 (2)

## SMOOTH SURFACE



ASHEN GRAY OT03 (2)



ADOBE BROWN OT05 (2)




SAHARA SAND OT08 (2)




DIABLO RED OT01 (1)

## FLASH



ASHEN FLASH OT04 (2)



ADOBE FLASH OT06 (2)



RED FLASH OT02 (1)

## TEXTURE NOTES:

Abrasive surface available in 6 x 6 and 8 x 8 sizes in OT01, OT03, OT05, OT08, colors only.

(1) and (2) indicate Price Groups, (1) being the least expensive.

## SIZES:



8 x 8  
Floor Tile



6 x 6  
Floor Tile

FINISHES: MATTE | TEXTURED



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT





INDOOR/OUTDOOR



SIMPLICLEAN™

SIZES

|  |                   |                                    | Thickness | Sq. Ft./ Carton | Pieces/ Carton |
|--|-------------------|------------------------------------|-----------|-----------------|----------------|
|  | 8 x 8 Floor Tile† | (8" x 8")<br>(20.30 cm x 20.30 cm) | 1/2"      | 11.11           | 25             |
|  | 6 x 6 Floor Tile† | (6" x 6")<br>(15.20 cm x 15.20 cm) | 1/2"      | 11.00           | 44             |

† Abrasive surface available in 6 x 6 and 8 x 8 sizes in OT01, OT03, OT05 and OT08 colors only.

APPLICATIONS

|  | Target DCOF wet | Suitable |
|--|-----------------|----------|
| Dry & Level – Interior Floor   | N/A             | ✓        |
| Wet & Level – Interior Floor   | ≥ 0.42          | ✓        |
| Shower Floors (Residential or Light Commercial)  | ≥ 0.42          | ✓**      |
| Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear) | ≥ 0.60          | ✓        |
| Ramps & Inclines   | ≥ 0.65          | ✓*       |
| Walls/Backsplashes   | N/A             | ✓        |
| Countertops  | N/A             | ✓        |
| Pool Linings   | N/A             | ✓**      |

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [daltile.com/DCOF](http://daltile.com/DCOF).

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

Suitable for industrial installation requiring high compressive strength.

Subject to Oils: Absorbs oils, grease and other liquids to keep floors slip-resistant, yet does not contaminate the surface. Proper cleaning methods easily remove any contaminants that do get absorbed into the tile.

\* Abrasive surface only

\*\* 6 x 6 only

INSTALLATION










| Grout Joint Recommendation | Shade Variation  |
|----------------------------|--|
| 3/8"                       |  High (V3) - non-Flash colors<br> Random (V4) - Flash colors |



All or select items within this series meet the requirements for these qualifications. For more information, visit [daltile.com](http://daltile.com).



TRIM

|   | Type                             | Number    | Size  | Pieces/ Carton |
|---|----------------------------------|-----------|-------|----------------|
|  | Bullnose                         | Q1665†    | 6 x 6 | 44             |
|  | Bullnose Corner                  | QCRL1665† | 6 x 6 | 44             |
|  | Round Top Cove Base              | Q3565 ▲   | 5 x 6 | 44             |
|  | Round Top Cove Base Corner Right | QCR3565 ▲ | 5 x 6 | 20             |
|  | Round Top Cove Base Corner Left  | QCL3565 ▲ | 5 x 6 | 20             |
|  | Cove Base Inside Corner          | QB3565 ▲  | 1 x 5 | 25             |
|  | Cove Base                        | Q3585 ▲   | 5 x 8 | 24             |
|  | Bullnose                         | Q1885     | 8 x 8 | 25             |
|  | Bullnose Corner                  | QCRL1885  | 8 x 8 | 25             |

Bullnose, cove base and cove base corner trim are intended to coordinate with floor tile in the standard 90-degree installation position.

† Available in abrasive surface

▲ Not available in Flash colors; use coordinating solid color.

PERFORMANCE CHARACTERISTICS

|                     | ASTM# | Result    |
|---------------------|-------|-----------|
| Water Absorption    | C373  | < 3.0%    |
| Breaking Strength   | C648  | > 400 lbs |
| Scratch Hardness    | MOHS  | 7.0       |
| Chemical Resistance | C650  | Resistant |

For additional information on test results, visit us at: [daltile.com/information/TestResults](http://daltile.com/information/TestResults).

DURABILITY

Floor Surface Wear Resistance

|                         |                                      |
|-------------------------|--------------------------------------|
| 1 Residential Bathrooms | 3 All Residential / Light Commercial |
| 2 All Residential Areas | ④ All Residential / Commercial       |

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [daltile.com/Factors](http://daltile.com/Factors).

Special care should be taken when grouting; a grout release is recommended to prevent finely powdered pigments from lodging in the pores of the tile surface.

It is necessary to follow the proper procedures and recommendations from the grout and maintenance products' manufacturers.

7834 C.F. Hawn Freeway,  
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at [daltile.com](http://daltile.com).



IMAGINE WHAT'S POSSIBLE™

©2022 Daltile (8/22)